


SINGLE SLIDING DOOR. A60

Art nr: MVS A-60

MOMEC
DOORS OF SWEDEN

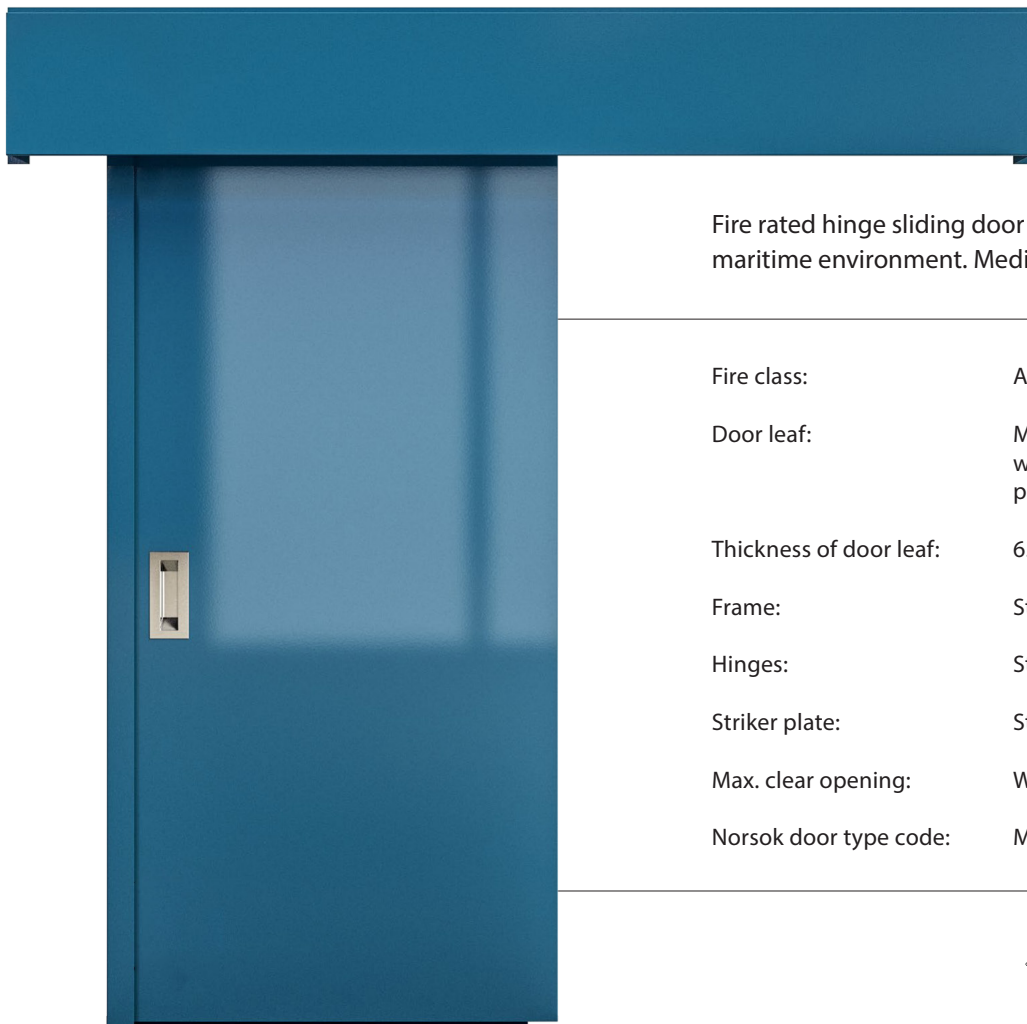

Fire rated hinge sliding door special made for use in a maritime environment. Medium duty door.

Fire class:	A60
Door leaf:	Made of 1,5 mm steel and insulated with mineral wool. Standard is powder coating in RAL 9010.
Thickness of door leaf:	63 mm
Frame:	Steel 4 mm. Silicone gasket four sides.
Hinges:	Stainless steel, 3 pcs
Striker plate:	Stainless steel
Max. clear opening:	W 1500 H 2200 mm
Norsok door type code:	M1/M2



The door are tested according to IMO 2010 FTP Code

OPTIONS

- Wet paint.
- Cover plate made in stainless steel for the sill.
- Kick/trolley plate made in stainless steel. H 300/800 mm.
- Air-and gas tightness.
- Vision panel max W400 x H600 mm.
- Hose port
- Electric access control systems
 - Door open system
 - Hold open system
 - Door sensor
- Electrical / Pneumatic drivesystem



OPTION EXAMPLE
Hose port

DOOR SPAREPARTS

We provide all the necessary accessories for our doors. Please contact our service department at:

Mail: service@momec.se | Phone: +46 734 42 55 87

Gaskets
Hinges
Handles
Lock Cases
Door Closers
Cylinders
Window Panels
Accessories

