


SINGLE DOOR VENTILATION B15.

WITH TOPMODULE

Art nr: MV2255VM

MOMECE
DOORS OF SWEDEN

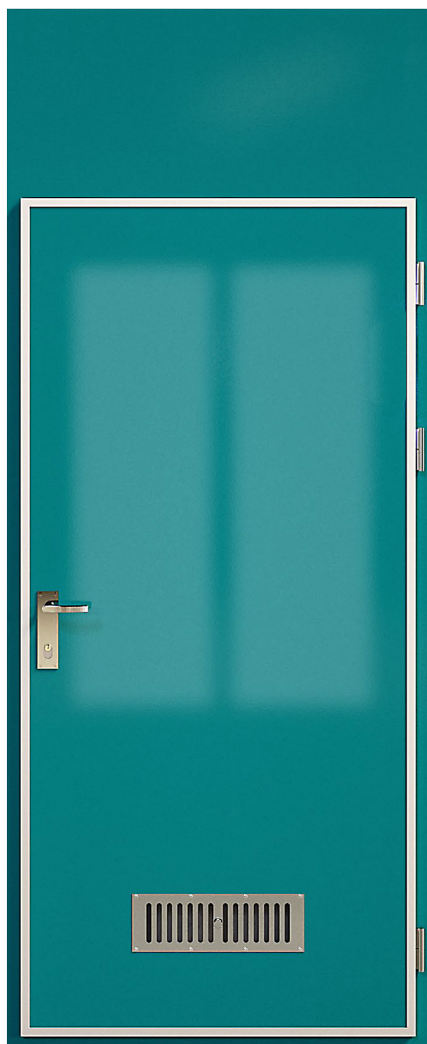

Fire rated hinge door special made for internal use in a maritime environment. Built-in ventilation channel. Light duty door.

Fire class:	B15
Soundreduction:	37 dB
Door leaf:	Made of steel and insulated with mineral wool. Standard is powder coating in RAL 9010
Thickness of door leaf:	56 mm
Frame:	Steel 1,5 mm
Hinges:	Stainless steel, 3 pcs
Striker plate:	Stainless steel
Sill cover:	Stainless steel
Ventilation duct:	130 cm ²
Max. clear opening:	W 1000 x H 2100 mm
Max. height w top panel:	H 2480 mm
Norsok door type code:	L1/L2



The door are tested according to IMO 2010 FTP Code

OPTIONS

- Laminated or pvc coated, stainless steel
- Kick/trolley plate made in stainless steel. H 300/800 mm.
- Panic device
- Electric access control systems
 - Door open system
 - Hold open system
 - Door sensor

DOOR SPAREPARTS

We provide all the necessary accessories for our doors. Please contact our service department at:

Mail: service@momec.se | Phone: +46 734 42 55 87

Gaskets
Hinges
Handles
Lock Cases
Door Closers
Cylinders
Window Panels
Accessories

