


SOUNDREDUCTION DOOR. B30

Art nr: MV2255dBM

MOMECE
DOORS OF SWEDEN

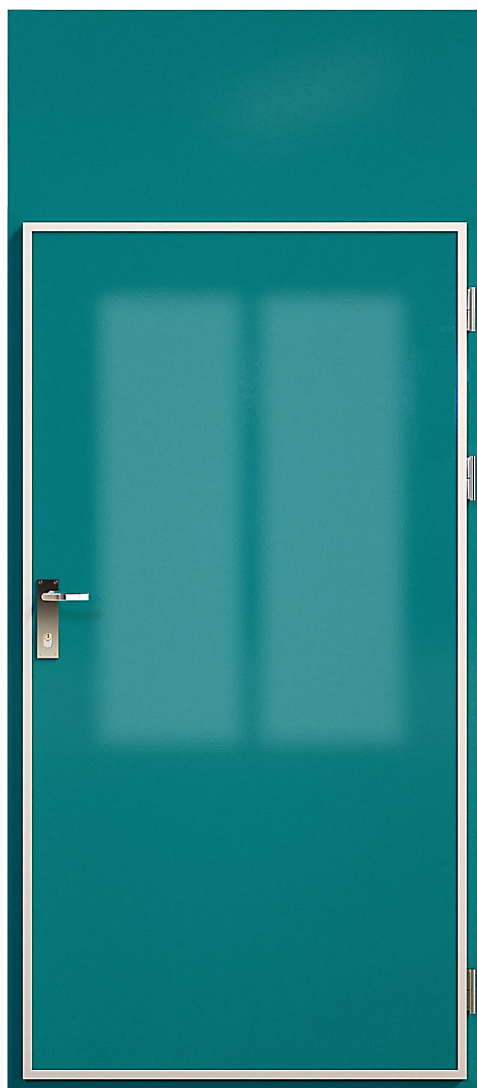

Fire rated hinge soundreduction door special made for internal use in a maritime environment. Light duty door.

Fire class:	B30
Sound:	44 dB
Door leaf:	Made of steel and insulated with mineral wool. Standard is powder coating in RAL 9010
Thickness of door leaf:	53 mm
Frame:	1,5 mm steel.
Hinges:	3 pcs of stainless steel
Striker plate:	Stainless steel
Sill cover:	Stainless steel
Max. clear opening:	W 1000 x H 2000 mm
Max. weight w topmodule:	H 2476 mm
Norsok door type code:	L1/L2



The door are tested according to IMO 2010 FTP Code

OPTIONS

- Laminated or pvc coated, stainless steel
- Kick/trolley plate made in stainless steel. H 300/800 mm.
- Panic device
- Kick-out panel
- Electric access control systems
 - Door open system
 - Hold open system
 - Door sensor



OPTION EXAMPLE
Kick-out panel

DOOR SPAREPARTS

We provide all the necessary accessories for our doors. Please contact our service department at:

Mail: service@momec.se | Phone: +46 734 42 55 87

- Gaskets
- Hinges
- Handles
- Lock Cases
- Door Closers
- Cylinders
- Window Panels
- Accessories

